

DIFUSION
HIORAUCA LLUIS S.A.

Polígono Indus. Vilamalla
 c/ Garbí, 21-23
 17469 VILAMALLA Tels. (972) 52.50.12
 (Girona) - España Fax (972) 52.54.77

OFFER

ORDER

N°

Costumer

Ref.


Mr./Mrs.

Date


Page 1/2

HYDRAULIC VERTICAL STAIRLIFT



DHM-OPEN Model

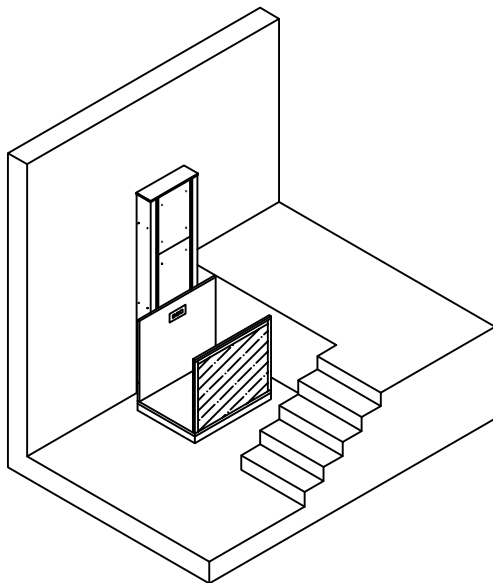

UPPEST LEVEL

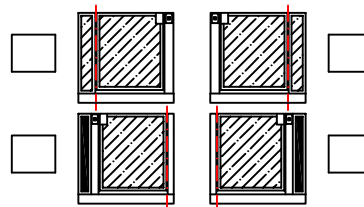

LOWER LEVEL

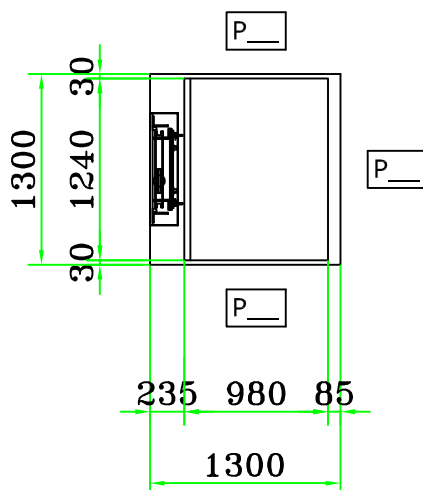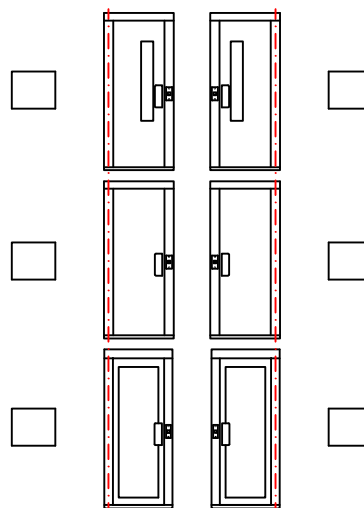

BE CAREFUL: indicate please the access in each level and the doors opening side


Contact e-mail address

Delivery time

WEEKS

Signature

Date costumer acceptance

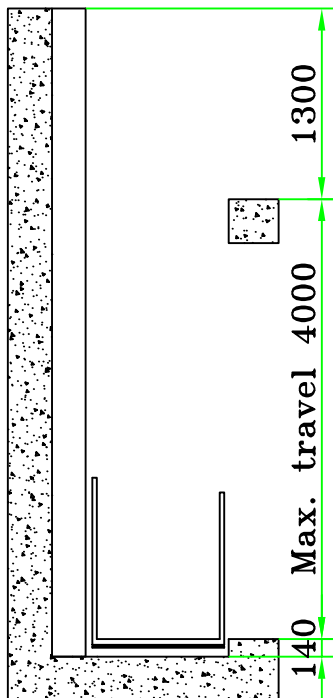

RAMP:
NO
YES

Guides height	Useful travel
Rec. +1420 mm	_____mm <input type="checkbox"/>

Dimensions:	
Shaft	Useful platform
1300 x 1300	900 x 1200 <input type="checkbox"/>
1300 x 1500	900 x 1400 <input type="checkbox"/>

Automatic doors openers:

Remote control:

Characteristics:

Max. speed 0.15m/sec.
Load 300Kg.
One touch buttons in car.
Monophase supply 230Vac.
Pit: 140mm.
Max. travel: 4000 mm
Light curtain protection.
Lower protection with safety edges.
Belows protection.
Emergency battery.
Doors with electric temporized locks and close door switch.
Motorized doors optional.

Finishers:

All painted in grainy epoxy
RAL 3005 - RAL 7032
Stretch marked aluminium floor
Glass cabin
Stainless steel button panel and handrail.

Button panel:

In the lower floor, surface button panel with a key.
In the upper floor, surface button panel on frame door with 1 key.
In the car, inclining console with disconnection key, calling buttons, alarm button and emergency stop.

Important: walls next to the cabin must be smooth, without cutting edges. The shaft must be closed until 2 m height in the lowest and inetermediate levels. In the uppest level the closing height is 1.1 m.

OBSERVATIONS:
